



# Rechargeable Sealed Lead-Acid Battery

## PS-1228

### 12 Volt 2.8 Amp. Hrs.



#### Features:


- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill proof construction allows safe operation in any position.
- Power/volume ratio yielding unrivaled energy density.
- Rugged ABS plastic case and cover
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




#### PERFORMANCE SPECIFICATIONS

<b>Nominal Voltage</b> .....	12 volts (6 cells in series)
<b>Nominal Capacity</b>	
20 hour rate (140mA to 10.50 volts) .....	2.80 A.H.
10 hour rate (250mA to 10.50 volts) .....	2.50 A.H.
5 hour rate (480mA to 10.20 volts) .....	2.40 A.H.
1 hour rate (1700mA to 09.00 volts) .....	1.70 A.H.
15 min rate (5300mA to 09.00 volts) .....	1.32 A.H.
<b>Approximate Weight</b> .....	2.60 pounds (1.18 kg)
<b>Energy Density (20 hour rate)</b> .....	1.29 Watt-hours/cubic inch (78.9 Watt-hours/l)
<b>Specific Energy (20 hour rate)</b> .....	12.9 Watt-hours/pound (24.47 Watt-hours/kg)
<b>Internal Resistance (Fully Charged Battery)</b> .....	45 milliohms (approximately)
<b>Maximum Discharge Current ( ≤ 7 Min.)</b> .....	8.4 amperes
<b>Maximum Short-Duration Discharge Current ( ≤ 10 Sec.)</b> .....	28 amperes
<b>Terminals</b> .....	"F1": Quick disconnect tabs, 0.187" x 0.032"- Mate with AMP. INC. FASTON "187" series
<b>Shelf Life — % of nominal capacity at 68° F (20° C)</b>	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
<b>Operating Temperature Range</b>	
<b>Charge</b> .....	-4°F (-20°C) to 122°F (50°C)
<b>Discharge</b> .....	-4°F (-20°C) to 140°F (60°C)
<b>Case</b> .....	ABS Plastic


**Shelf Life and Storage**

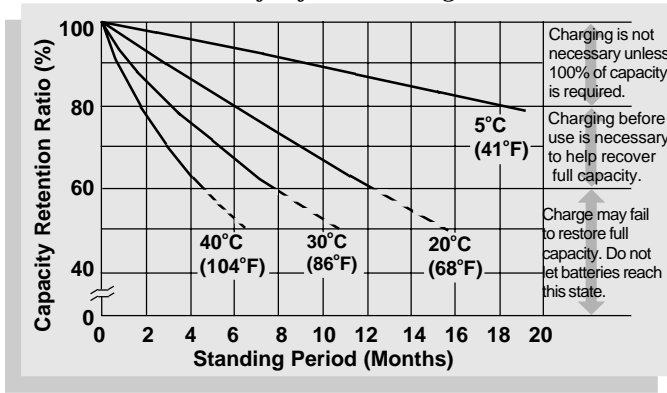


**Discharge Characteristics**

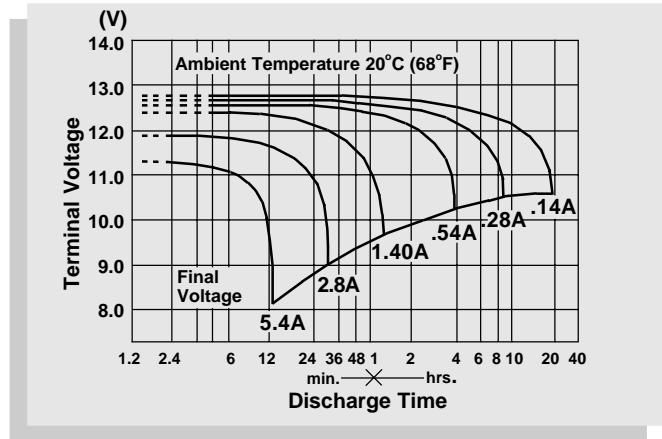


**Life Characteristics in Stand-By Use**

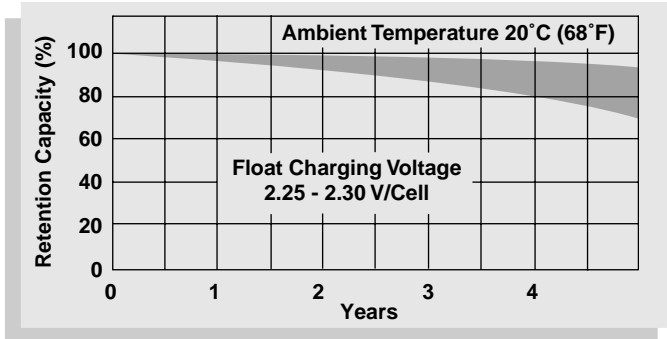

**Discharge Time vs. Discharge Current**




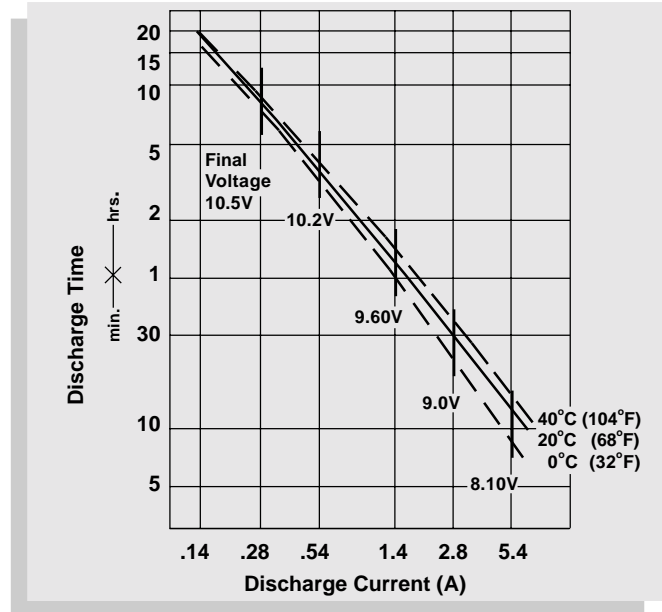


**Life Characteristics in Cyclic Use**

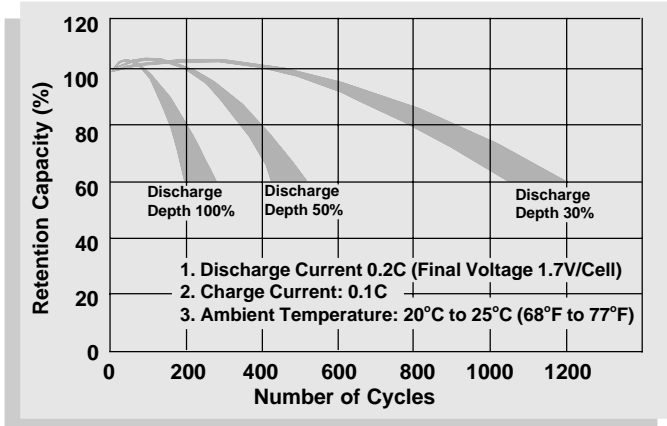

Physical Dimensions: in. (mm)

Terminals: F1 (mm)

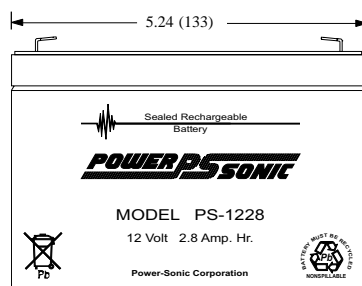

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

**CHARGING**

**Cycle Applications:** Limit initial current to 900mA. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 28mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

**"Float" or "Stand-By" Service:** Hold battery across constant voltage source of 13.50 to 13.80 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**NOTE:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.



**SALES & MARKETING**  
 3106 Spring Street  
 Redwood City, CA 94063 USA  
 Tel: 650-364-5001 Fax: 650-366-3662  
 national-sales@power-sonic.com



www.power-sonic.com

**ISO9001-2000**  
 FM39170

**CUSTOMER SERVICE**  
 7550 Panasonic Way  
 San Diego, CA 92154 USA  
 Tel: 619-661-2030 Fax: 619-661-3648  
 customer-service@power-sonic.com